

STLONG®

CHLS STAINLESS STEEL

ELECTRONIC AUTOMATIC WATER PUMP SET

CHLS 不锈钢电子自动水泵系统



DESCRIPTION

STLONG CHLS Stainless Steel Electronic Automatic Water Pump Set is compact in size and do not require complicated installation.

Designed with advanced features such as the leakage-free design and fully stainless steel materials for rust-free operation without affecting your water quality.

This pump provides silent, strong and comfortable water pressure all the time. STLONG CHLS assures you the best water system performance for your home.

简介

STLONG CHLS 不锈钢电子自动水泵系统结构紧凑，安装程序简易。此款泵采用先进的技术设计，例如无漏设计，以及融合了防锈的全不锈钢结构，即使年久也不会生锈，所以绝不会影响到您的用水品质。同时，它在运作时保持静音，随时随地提供强力且舒适的水压，确保您家里的供水系统处于最佳的运作状态。



SILONG[®] CHLS STAINLESS STEEL ELECTRONIC AUTOMATIC WATER PUMP SET

CHLS 不锈钢电子自动水泵系统



APPLICATION

1. Domestic & commercial water transfer
2. Ideal for small to medium size of residences
3. Pressure boosting
4. Industrial cleaning
5. Cooling system
6. Aqua farming

FEATURE & BENEFIT

1. Compact design and small in size
2. Fully 304 stainless steel pump body for rust-free
3. Major components and wetted parts are manufactured from corrosion-resistant and wear-resistant 304 stainless steel
4. Highly corrosion-resistant suitable for various corrosive liquids
5. Super silent operation and low energy consumption
6. Suitable for continuous operation
7. No risk for pump running dry because it will stop operation
8. Easily installed and serviced
9. Constant and high water Pressure



PERFORMANCE CHART

Model	Motor Power (kw)	Capacity Q(m ³ /h)							Pipe Connection		Suitable For	
		0.5	1.0	1.5	2.0	2.5	3.0	3.5	Inlet	Outlet		
CHLS 2-20	0.37	H(m)	19	18	16	14	13	11	9	1"	1"	
CHLS 2-40	0.55		36	34	32	28	26	23	17	1"	1"	

Model	Motor Power (kw)	Capacity Q(m ³ /h)							Pipe Connection		Suitable For	
		1	2	3	4	5	6	7	Inlet	Outlet		
CHLS 4-30	0.75	H(m)	28	27	24	22	19	15	10	1-1/4"	1"	
CHLS 4-40	0.75		38	36	32	30	26	20	14	1-1/4"	1"	

STLONG[®] CHLS STAINLESS STEEL ELECTRONIC AUTOMATIC WATER PUMP SET

CHLS 不锈钢电子自动水泵系统



用途

1. 家庭及商业输送用水
2. 水供增压系统
3. 工业清洗
4. 冷却系统
5. 水产养殖、农耕









特征与优点

1. 结构紧凑，体积小
2. 304不锈钢泵体结构，防锈效果佳
3. 主要部件及过流部件采用304不锈钢制造，使用寿命长
4. 耐腐蚀性能佳，适合处理多种腐蚀性液体
5. 静音运作，低能源消耗
6. 适于连续运作
7. 在无水状态下会自动停止操作，没有安全顾虑
8. 容易安装与维修
9. 提供恒压及强力供水



性能表


型号	电机功率 (kw)	流量 Q(m ³ /h)							连接管		适用于	
		0.5	1.0	1.5	2.0	2.5	3.0	3.5	进口	出口		
CHLS 2-20	0.37	H(m)	19	18	16	14	13	11	9	1"	1"	  
CHLS 2-40	0.55		36	34	32	28	26	23	17	1"	1"	   

型号	电机功率 (kw)	流量 Q(m ³ /h)							连接管		适用于	
		1	2	3	4	5	6	7	进口	出口		
CHLS 4-30	0.75	H(m)	28	27	24	22	19	15	10	1-1/4"	1"	   
CHLS 4-40	0.75		38	36	32	30	26	20	14	1-1/4"	1"	    

STLONG[®] CHLS STAINLESS STEEL ELECTRONIC AUTOMATIC WATER PUMP SET

CHLS 不锈钢电子自动水泵系统

INSTALLATION EXAMPLE / 安装示意图

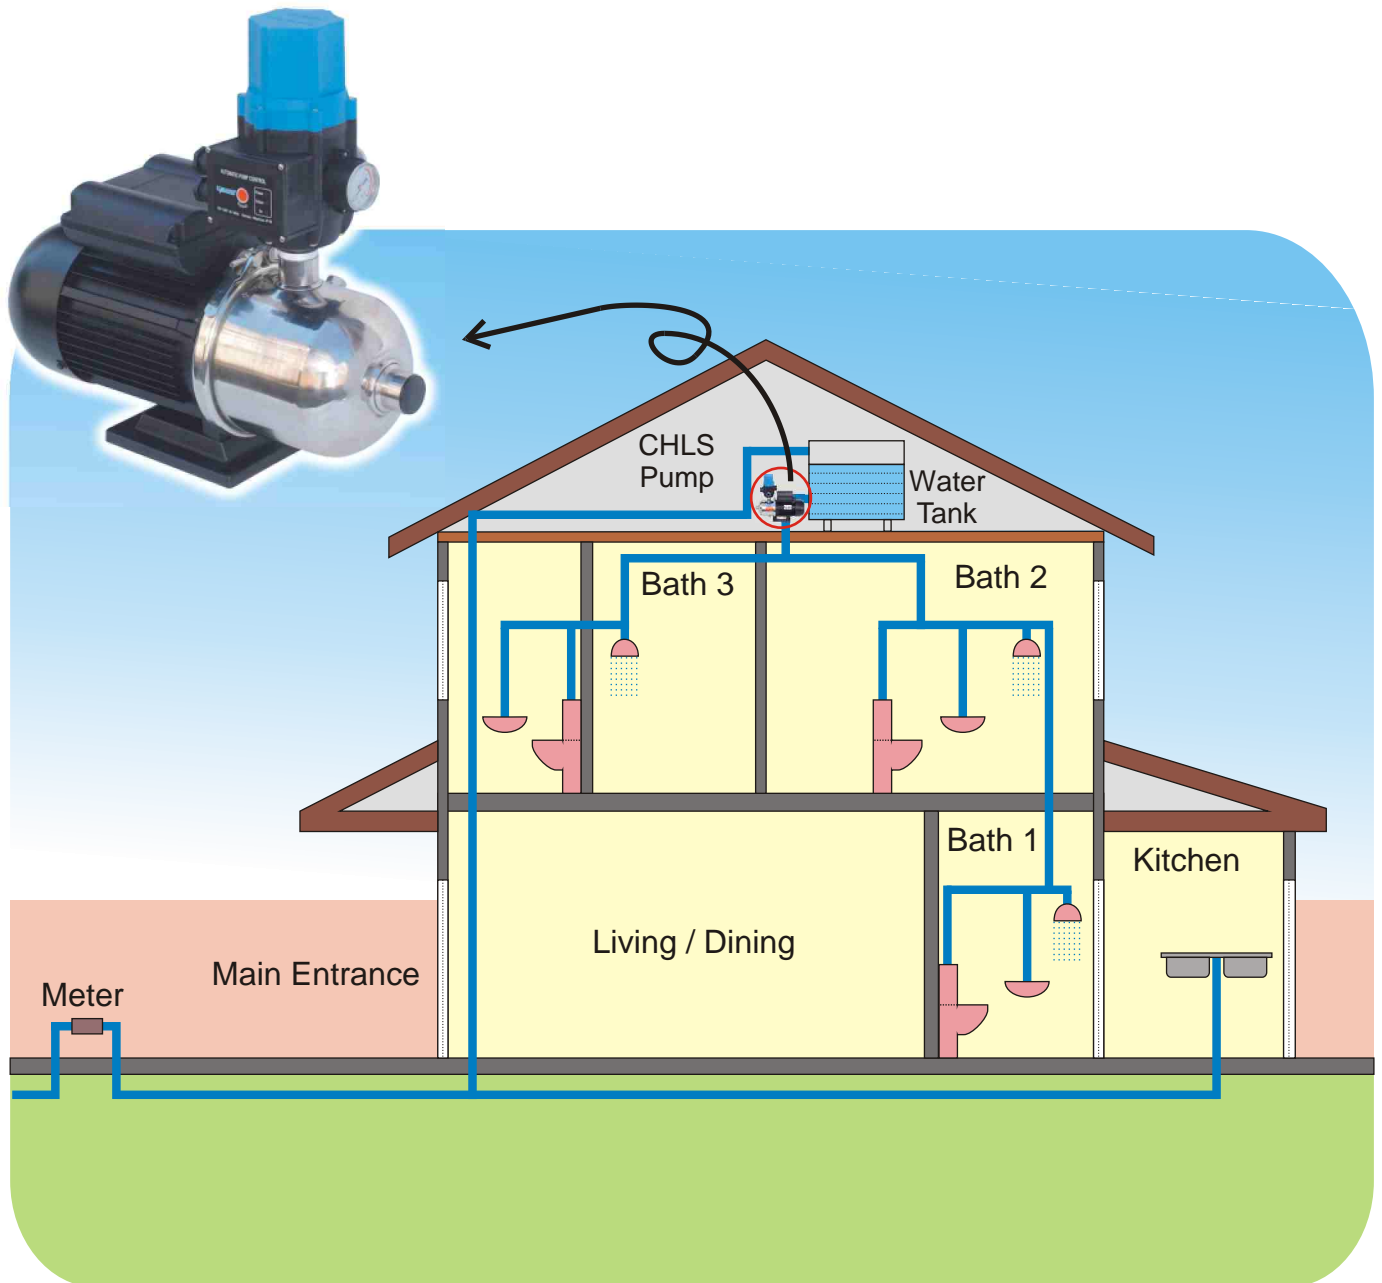

THONG FATT JAYA MACHINERY HARDWARE SDN. BHD.

同發機械五金有限公司 (176024-V)

707-709, Jalan Kuala Kangsar, Taman Tasek Jaya,
31400 Ipoh, Perak. Malaysia.
Tel: 00-605-5468 659, 5455 751, 5479 196, 5454 107
Fax: 00-605-5482 282, 5474 753
Email: tfjaya@streamyx.com / tfjaya@tm.net.my
Website: <http://www.thongfattjaya.com.my>