



SELF PRIMING CENTRIFUGAL TRASH PUMP

TP-80

Specifications Data

PUMP	MODEL	TP80
	Inlet/Outlet Dia. (mm / inch)	80 / 3
	Max. Head (m)	26
	Max. Capacity (L/min)	1300
	Suction Head (m)	8
ENGINE	MODEL	DEK F300
	Type	4-stroke, single cylinder diesel engine
	Displacement (ml)	296
	Max. Output (hp/rpm)	6.7 / 3600
	Start Mode	Recoil & electric start
	Fuel Tank Capacity (L)	3.5
	Fuel Continuous Time (hr)	2.5
	Weight (kg)	55



TP80 c/w DEK Diesel Engine F300 & Frame



TP80H c/w Pedestal

Specifications Data


MODEL	TP80
Inlet/Outlet Dia. (mm / inch)	80 / 3
Max. Head (m)	26
Max. Capacity (L/min)	1300
Suction Head (m)	8
Weight (kg)	17

Performance Curve

DEK TRASH PUMP is specifically designed for handling solids and slurries up to 25mm diameter. If clog occurs, it can be removed easily with open the T-thumb screw on the front cover. No special tools are required.



TP80H

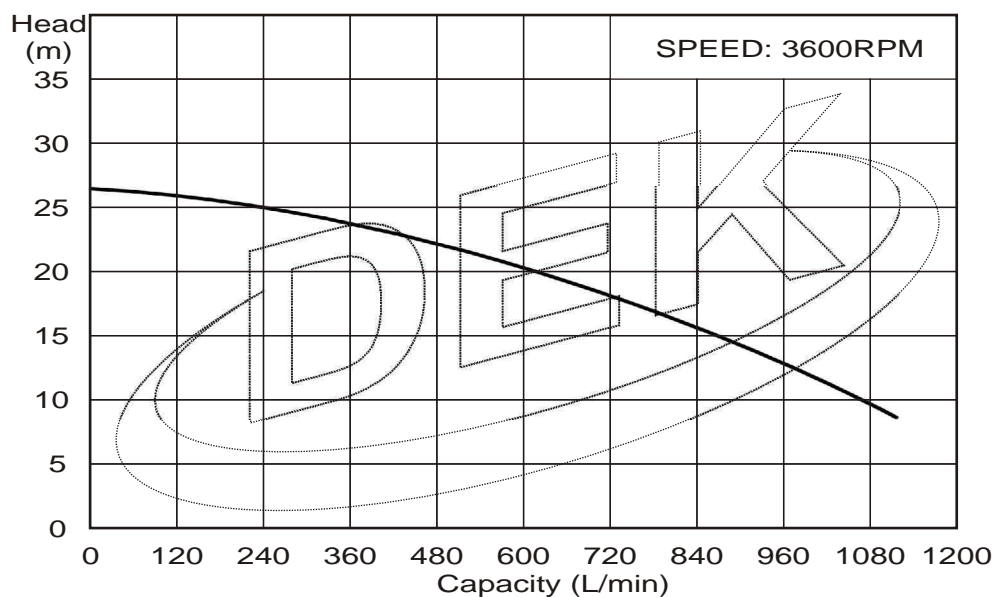

THONG FATT JAYA MACHINERY HARDWARE SDN. BHD.

同發機械五金有限公司 (176024-V)

707-709, Jalan Kuala Kangsar, Taman Tasek Jaya, 31400 Ipoh, Perak, Malaysia.
 Tel: 00-605-5468 659, 5455 751, 5479 196, 5454 107
 Fax: 00-605-5482 282, 5474 753
 Email: tfjaya@streamyx.com / tfjaya@tm.net.my
 Website: http://www.thongfattjaya.com.my