



INDUSTRY GEAR PUMP GP SERIES

APPLICATION

* PETROLEUM * CHEMICAL * PAINT * PRINTING INK
* OIL, FOOD & PHARMACEUTICAL INDUSTRIES * ETC

SPECIFICATION DATA

Model	Pressure (bar)	Capacity (m3/h)	Suction Head (m)	Power (kw)	Speed (rpm)	Inlet (inch)	Outlet (inch)
GP-25	8	5	3	1~5	960	1"	1"
GP-25W	8	2~5	3	1.5~2.2	360~960	1"	1"
GP-40	7	7	3	3	960	1-1/2"	1-1/2"
GP-40W	7	4~7	3	2~3	400~960	1-1/2"	1-1/2"
GP-50W	6	6~14	3	5.5	200~500	2"	2"
GP-80W	6	7~18	3	7.5	200~500	3"	3"
GPK-25	1~5	1.2~1.8	3	1.5~2.2	960~1450	1"	1"
GP-70-2CY	3~6	18~29	5	5.5~7.5	960~1450	70mm	70mm

Material Of Construction


	Carbon Steel	Carbon Steel	Stainless Steel
Casing			
Gear	Carbon Steel	Bronze	Stainless Steel

Gear type- Spur or helical

Drive- Direct couple or pulley



GP-40W

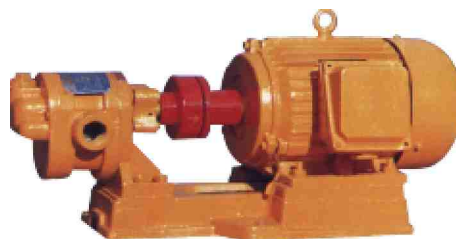

GPK-25



GP-70-2CY



THONG FATT JAYA MACHINERY HARDWARE SDN. BHD.

同發機械五金有限公司 (176024-V)

707-709, Jalan Kuala Kangsar, Taman Tasek Jaya,
31400 Ipoh, Perak. Malaysia.
Tel: 00-605-5468 659, 5455 751, 5479 196, 5454 107
Fax: 00-605-5482 282, 5474 753
Email: tfjaya@streamyx.com / tfjaya@tm.net.my
Website: http://www.thongfattjaya.com.my