


FDPH-400



- Pump casing of precision die-cast aluminum.
- Back flange & pedestal of durable cast iron.
- Cast iron volute & impeller.
- Stainless steel shaft.
- Economical, high head & efficiency & low power requirement.
- General purpose pumping, irrigation & sprinkler system.
- Engine power required:
7.5KW / 10HP / 3600rpm
4.0KW / 5.5HP / 3000rpm

Model : FDPH-400
Max. Head : 35m/115ft
Max. Capacity : 1800L/min(400gal/min)
Suction Head : 8m
Self Priming Time : 120sec/5m
Connection Diameter : 100mm (4 inch)

PERFORMANCE CURVE

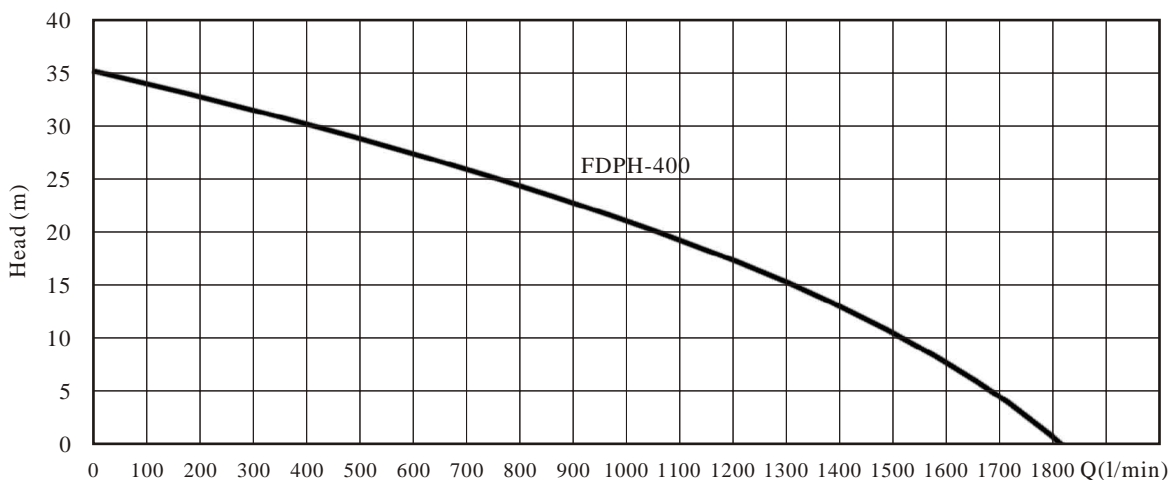

THONG FATT JAYA MACHINERY HARDWARE SDN. BHD.

同發機械五金有限公司 (176024-V)

707-709, Jalan Kuala Kangsar, Taman Tasek Jaya,
31400 Ipoh, Perak. Malaysia.
Tel: 00-605-5468 659, 5455 751, 5479 196, 5454 107
Fax: 00-605-5482 282, 5474 753
Email: tfjaya@streamyx.com / tfjaya@tm.net.my
Website: <http://www.thongfattjaya.com.my>